



Designed Smart

Developed for high output!

Flexwav™ 1829 Radiant Pass Through Conveyor Toaster uses a series of cutting edge controls and infrared heat systems that are focused at your food, delivering a level of heat energy for Broiling, Toasting, Baking and Warming.

Heat Systems is the Difference!

- Flexwav® ceramic heat system has over 31% more efficiency in its InfraRed Energy vs. Quartz based units.
- Flexwav® heat system is a concentrated, focused source of radiant energy that consistently sends InfraRed evenly toward the conveyor belt. At both high and low temperature levels, InfraRed efficiency is 96%
- Hot toasted sandwiches in 1 minute. Perfect pizza in 7-9 minutes.

Flexible Control!

- Flexwav® cooking control system utilizes a programmable digital Control for a variety of menu options.
- Choosing a menu option will automatically adjust the heat settings, top and bottom independently, and the conveyor speed.

Operations that are Flexible & Efficient!

- Conveyor speed can be set between speeds from 12 minutes to 30 seconds.
- Conveyor direction can be reversed with a flip of the switch.
- Crumb trays are provided on either end of the toaster. 12" Extended Conveyor shelves are supplied for both "entrance or exit" areas allowing easy loading and off-loading of products.
- Fully insulated top and sides provide "Cool to the Touch" exteriors. Thermostatically controlled fan keeps exterior surface cool even when unit is turned off.

Built Solid

Built to Last

- Flexwav™ 1829 Ceramic heaters are made of a stronger material that maintains a moderate material temperature. They last significantly longer than Quartz elements and do not have the issue of shattered glass in your operation.
- Bottom heat is provided by a specially placed elements that can easily handle drippings and grease. Competitive units use quartz elements that can shatter with grease drippings.
- Brushless DC conveyor motor is long lasting.

Reliability backed by APW Wyott's Warranty

- Certified by the following agencies:



Flexwav THROUGH CONVEYOR TOASTER

APW Wyott Design Features

- Flexwav™ 1829 toasters are designed to Toast, Broil, Bake and warm a variety of menu items while minimizing countertop space.
- Ceramic InfraRed heaters located on the top provide the most efficient and effective radiant energy to the cooking area.
- Flexwav™ 1829 bottom heat is provided by a specially placed metal sheathed elements that direct a concentrated level of energy to the food.
- Flexwav™ 1829 solid state digital controls provide the maximum amount of control to top and bottom heat.
- Conveyor belt direction switch to reverse flow of food.
- Thermostatically controlled fan cooling system keeps the conveyor toaster "Cool to the Touch" and extends the life of critical components.
- Conveyor belt speed control and top & bottom heat control enables different menu items to be cooked in the same toast er... provides superior flexibility.
- Product entry and exit openings are adjustable to 3" high.
- Removable extended load/unload shelf area for ease of product removal.

Options

- Stacking Kit (94000189)
- End stop (94000151)
- 3 Phase



See reverse side for product specifications.




flexwav™ 1829 Pass-Through Conveyor Toaster

Model: Flexwav 1829

PRODUCT:

QUANTITY:

ITEM #:

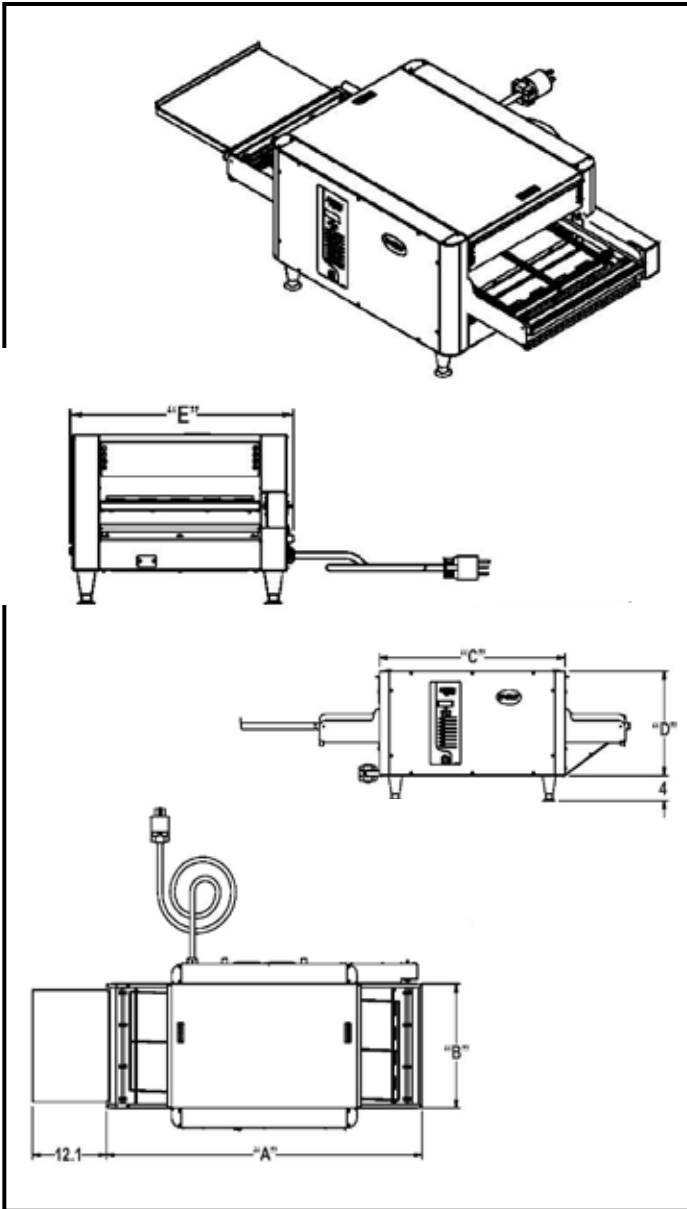

PRODUCT SPECIFICATIONS

Construction:

Flexwav™ 1829 external top, back, sides and base are made of 18 gauge stainless steel. Conveyor belt is made of non-corrosive steel(304SS). Internal Chamber is made of 18 gauge Stainless Steel. 4" steel legs. High temperature insulation used around cooking chambers.

Electrical Information:

Flexwav™ 1829 is equipped with a 6ft., 4 wire grounded power cord with a 15-30p plug for 3 phase. Single phase is provided with a 6-50p plugs. Power cord exits out the back of the unit.

Electrical Specifications:

Flexwav™ 1829 : 208V, 9000W, 20amps 3ph
 240V, 7000W, 20amps 3ph

Overall Dimensions:

Flexwav™ 1829 50 1/2" (128.2 cm)
Length with entrance
and exit shelves: 74 1/2" (189.2 cm)
Length of conveyor
belt outside of chamber
(for exit/entrance): 10 1/2" (27 cm)
Width: 28" (71 cm)
Height with 4" legs: 18" (46 cm)
Height of work deck: 10 3/4" (27.3 cm)
Height of 2 stacked: 34 1/4" (87 cm)
Height of 3 stacked: 50 1/4" (128.3 cm)

Flexwav™ 1829 Footprint Leg placement

Length: 24 1/20" (61 cm)
Depth: 22" (56 cm)

Toaster Cooking Chamber:

Length: 29" (74 cm)
Depth: 18" (46.5 cm)
Height (Max): 3 7/8" (9.6 cm)

Shipping Weight:

Flexwav™ 1829: 222 lbs (110 kg)

Freight Class: 100
F.O.B. Dallas, TX

Consultant Specifications

Toasters are constructed of stainless steel, painted aluminum extrusions, and polycarbonate material. Range of belt speeds should be 30 seconds to 12 minutes and is controlled by a Solid State Digital System. Conveyor belt is reversible with a flip of a switch. Single toaster furnished with 4" adjustable legs. Infrared ceramic radiant heaters and on/off heat switch for heat control are standard. Product opening adjustable from 1" to 3 3/4", motors are permanently lubricated. Units are UL listed, UL Sanitation, and Canadian UL approved.

*APW Wyatt reserves the right to modify specifications or discontinue models without incurring obligation.



Pizzaovens.com

1.877.FOR.OVEN
367.6836

Since 1999