



PRODUCT SPECIFICATIONS

Construction:

Stainless steel housing and radiant reflector.

Electrical Information:

Each unit is equipped with a 39", three wire grounded power cord which terminates with a standard three-pronged male plug. The 120V unit uses a NEMA 5-15P and the 208/240V units use a NEMA 6-20P plug.

Electrical Specifications:

AT-10: 120V - 1760W, 14.7 Amps

208V - 2840W, 13.6 Amps

230V - 2840W, 12.3 Amps

240V - 2840W, 11.8 Amps

AT-10BT: 120V - 1760W, 14.7 Amps

(1400W Top, 360W Bottom)

AT-30: 208V - 3340W, 16.0 Amps

230V - 3340W, 14.5 Amps

240V - 3340W, 13.9 Amps

Overall Dimensions:

Refer to drawings. Product opening is 1½" .

Shipping Weight:

AT-10: 45 lbs. (20.5 kg)

AT-10BT: 45 lbs. (20.5 kg)

AT-30: 52 lbs. (23.61 kg)

Capacity:

AT-10/120V: 300 slices per hour


AT-10/208V: 600 slices per hour

AT-10/240V: 600 slices per hour

AT-10BT/120V: 600 bun halves per hour

AT-30/208V: 900 slices per hour

AT-30/240V: 900 slices per hour

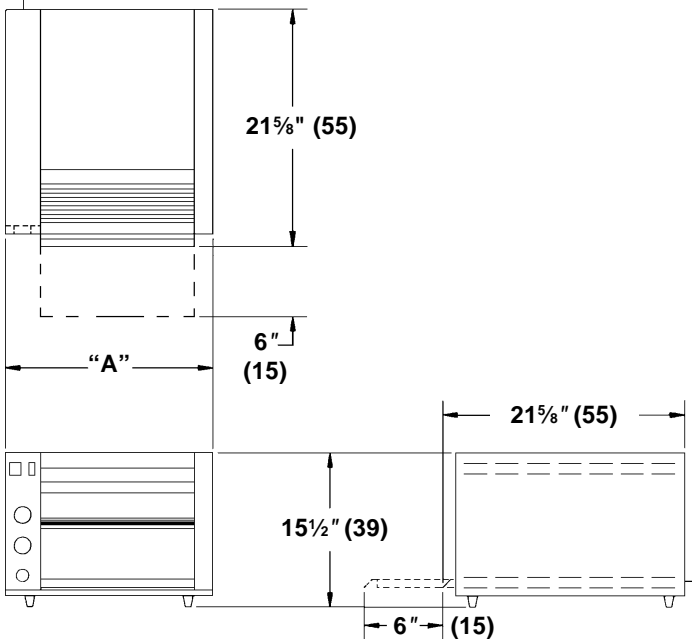

Model	Dim. "A"
AT-10	15 ⁵ / ₁₆ " (39)
AT-30	18 ⁵ / ₁₆ " (47)
AT-10BT	15 ⁵ / ₁₆ " (39)

(Centimeters In Parenthesis)