



COUNTER TOP ELECTRIC PIZZA & BAKE OVENS

Job _____ Item # _____

ELECTRIC COUNTER TOP OVENS

☐ Model DP-2

STANDARD FEATURES

- ☐ DP-2 @ 5050 watts in 208V or 220-240V
- ☐ Two independent, operator controlled cook/bake chambers each with a separate set of controls
- ☐ Two 15-minute electric timers with continuous ring, audible alarms and manual shut-offs (one for each chamber)
- ☐ 300°-650°F (149°-343°C) Thermostats (one for each chamber)
- ☐ Cordierite hearth decks
- ☐ 5 1/2" Deck height (140mm)
- ☐ All stainless steel exterior
- ☐ Unitized, welded, aluminized steel interior
- ☐ Fully insulated
- ☐ Limited one year parts & labor warranty
- ☐ 4" (102 mm) adjustable legs
- ☐ Interior lights



Model DP2
with optional top & bottom heat controls

SPECIFICATIONS

The DP-2 electric counter top ovens feature two independent, operator controlled baking chambers with 5 1/2" (140mm) deck heights and Cordierite hearth decks making them ideal for baking and roasting or pizza. Perfect for pan pizza.

The DP-2 features two sets of controls — one set for each bake chamber. Each set consists of a 15-minute electric timer with continuous ring audible alarms and manual shut-offs, ready-on oven indicator light, and a 300-650° F (149-343°C) thermostat.

The exterior front, sides, top and door are fabricated of heavy gauge type 430 stainless steel with a #4 finish. Door handle is constructed of tubular stainless steel. Exteriors measures 26" wide (660mm) by 28" deep (711mm) by 24" tall (610mm) overall.

The interiors are constructed of high heat aluminized steel, welded to form a single unitized body. The entire oven is insulated with 1 1/2" thick (38mm) industrial grade insulation. Each Cordierite hearth deck measures 20 3/4" (527mm) by 20 3/4" (527mm) by 1/2" thick (13mm).

Incoloy, tubular heating elements provide top and bottom heat with up to 5050 watts in 208V or 220-240V, single or three phase. International voltages available. Ovens are stackable.





1 Year limited parts and labor warranty included.

OPTIONS & ACCESSORIES

- ☐ Stainless steel stand with or without casters
- ☐ Stacking kit
- ☐ Steel decks in lieu of Cordierite
- ☐ International voltages
- ☐ Infinite controls for independent top and bottom heat control
- ☐ Electronic digital timers
- ☐ High heat thermostat 300°-700°F (149°-371°C)

CERTIFICATIONS



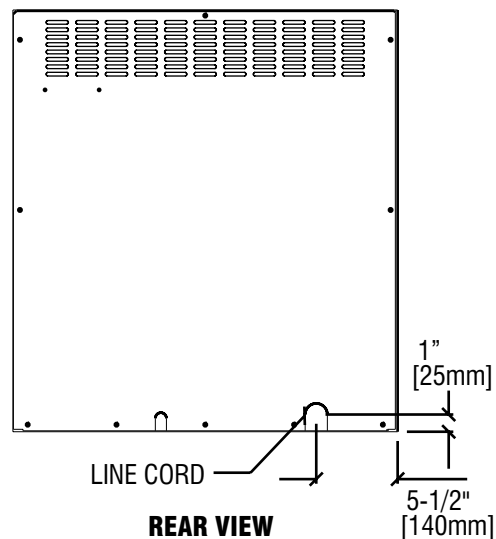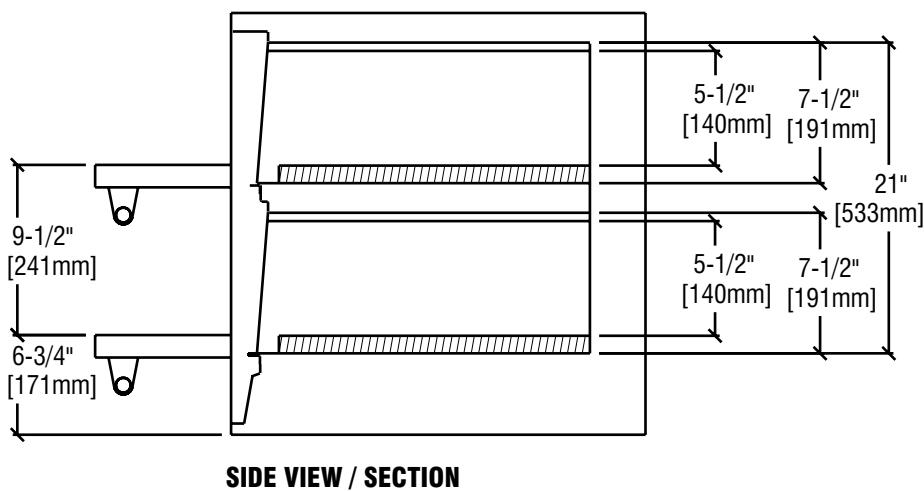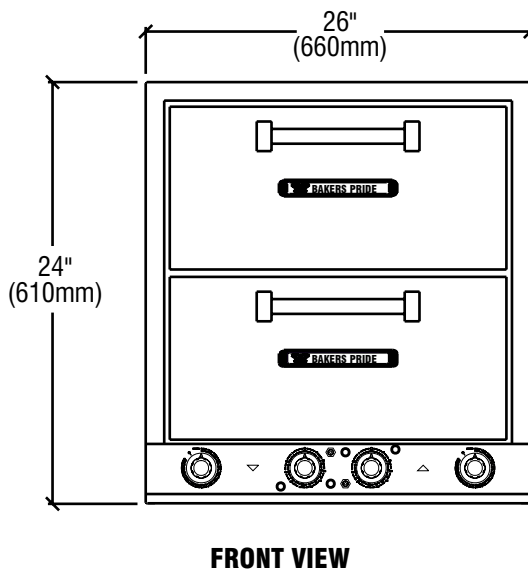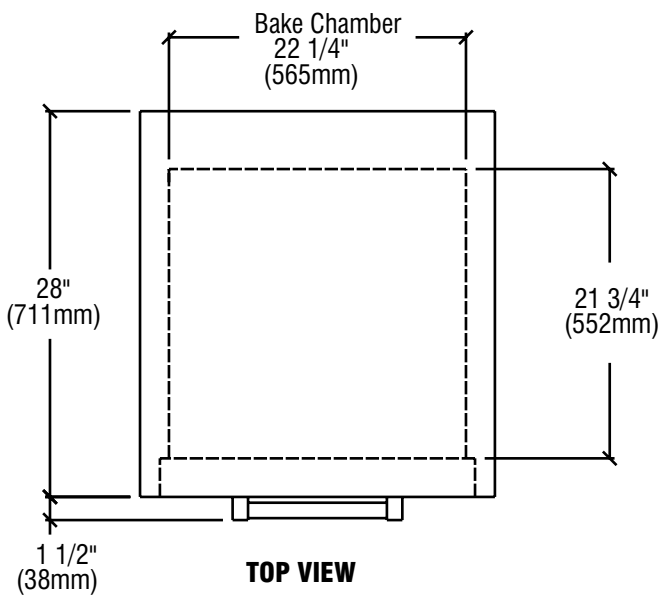

ALL DIMENSIONS NOMINAL

SHIPPING INFORMATION										
Model	Shipping Weight		Carton Dimensions						Crate Size	
	Lbs.	Kilos	Width Inches mm	Depth Inches mm	Height Inches mm	Cubic Feet	Cubic Meter			
DP-2	278	126	36 914	32 1/2 826	32 813	17.7	.51			

Under 500 lbs = Shipping Class # 70

Model	WATTS	VOLTAGE	PHASE	AMPS	NEMA Plug #			
					USA	Canada	UK	Europe
DP2	5050	208	1 & 3	24.5 & 14.0	6-30P	6-30P		
DP2	5050	220-240	1 & 3	22.0 & 12.7	6-30P	6-30P		

Each oven requires a separate electrical connection.

1 Phase and Canada include cord and plug

3 Phase and International voltages has no line cord

SPECIFICATIONS										
Model	Deck Size		# Decks	# Cook Chambers	Overall Dimensions					
	Inches	mm			Width		Depth		Height*	
					Inches	mm	Inches	mm	Inches	mm
DP-2	20 3/4 x 20 3/4	527x527	2	2	26	660	28	711	24	610

* Height without legs

	Non-Combustible Construction*		Combustible Construction**	
	Inches	mm	Inches	mm
Left Side	0	0	1	25
Right Side	0	0	1	25
Rear	0	0	1	25

* In European Community Countries and North America. In NON-COMBUSTIBLE locations only.
** In European Community Countries only in COMBUSTIBLE locations. NOT for North America.



6-30P US & Canada

