



Item #: _____
Model #'s: MCO-ES-10/20-S, MCO-ED-10/20-S
Product Name: Master Electric Convection Oven



Model MCO-ES-10-S

Specifications:

Garland Master Full-Size Standard Depth Single or Double (MCO-ES-10/20-S) or Deep Depth Single or Double (MCO-ED-10/20-S) electric convection oven. 10.4 kW/cavity, 3/4 HP fan motor with two speed fan control. Master 200 Mechanical Control. Porcelain enameled oven interior with coved corners, Six (6) oven racks and 13-position rack guides. Interior measures 29" (736mm) W x 24" (610mm) H x 24" (610mm) D for standard depth and 29" (736mm) W x 24" (610mm) H x 28" (610mm) D for deep depth. Stainless steel front, sides, top and legs. 60/40 dependent door design with double pane thermal window in both doors and interior lighting. Specify voltage and phase. UL, CUL and NSF Listed.



Standard Features:

- Master 200 Mechanical Control with 150° (66°)C to 500°F (250°C) temperature range and mechanical control.
- Two Speed Fan Control (High and Low) with 3/4 H/P motor.
- Total of 10.4 kW loading per oven cavity.
- Stainless steel front, sides, top and legs.
- 60/40 dependent door design with double pane thermal window in both doors and interior lighting.
- Porcelain enameled oven interior with coved corners.
- Six (6) chrome plated oven racks on 13-position rack guides.
- Service accessibility from the front.
- Double deck models available.
- One year limited parts and labor warranty (USA and Canada only).
- Five year limited door warranty, excluding window (USA and Canada only)

Optional Features:

- ☐ Window in left hand door with interior lighting.
- ☐ Stainless steel solid doors.
- ☐ Continuous clean oven interior.
- ☐ Stainless steel oven interior.
- ☐ Extra oven racks.
- ☐ Swivel casters, (4) w/ front brakes.
- ☐ Low profile casters, (4) w/ front brakes (double ovens only).
- ☐ Open base with rack guides and shelf (black powder coat epoxy or stainless steel).
- ☐ Mobile cart loading system with basket dollies (deep depth oven only).
- ☐ Back enclosure (black powder coat epoxy or stainless steel).
- ☐ 460 volt, 3 phase.
- ☐ Extended second year limited warranty (USA Only).








Item #: _____

Model #'s: MCO-ES-10/20-S, MCO-ED-10/20-S

Product Name: Master Electric Convection Oven

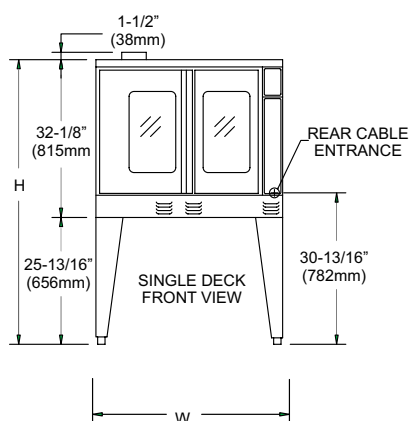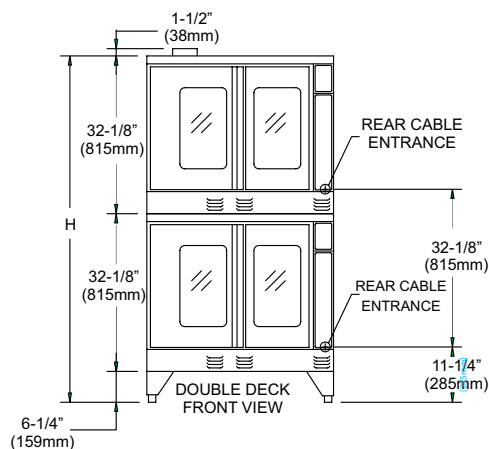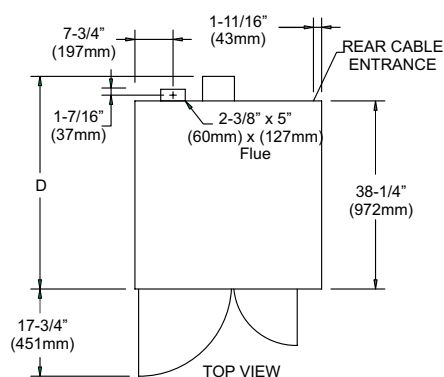

Installation Notes:

Non-Combustible and
Combustible Wall Clearances
Sides: 1" (25mm)
Back: 6" (152mm)

Entry Clearance:

Crated: 44 1/2" (1130mm)
Uncrated: 32 1/2" (826mm)

Model #	Interior Dimensions (per oven)			Ship Weight/Size	
	W	H	D	Lbs./Kg	Cu. Ft.
MCO-ES-10-S	29" (736mm)	24" (610mm)	24" (610mm)	510/232	42
MCO-ES-20-S	29" (736mm)	24" (610mm)	24" (610mm)	1020/464	84
MCO-ED-10-S	29" (736mm)	24" (610mm)	28" (711mm)	510/232	42
MCO-ED-20-S	29" (736mm)	24" (610mm)	28" (711mm)	1020/464	84

Model #	Total kW	Nominal Amperes Per Line, (includes ¾HP fan motor)										
		208V/1Ph	240V/1Ph	208V/3Ph			240V/3Ph			460V/3Ph		
				X	Y	Z	X	Y	Z	X	Y	Z
MCO-ES-10-S	10.4	50	43	30	30	28	26	26	24	14	14	13
MCO-ED-10-S	10.4	50	43	30	30	28	26	26	24	14	14	13

NOTE: Double deck models with suffix "-20-S" are provided with individual power supply connections

Electrical specifications include motor requirements.

3/4 HP, 2-speed motor: 1725/1140 rpm, (60Hz); or 1440/950 rpm (50Hz)

Please specify electrical characteristics when ordering.

Continuous product improvement is a Garland policy. Specifications and designs are subject to change without notice.

Form # MCO-ES/ED-10/20-S (3/2001)