


Fusion™ Express Conveyor Toaster Oven

Fusion™ Express Conveyor Toaster Oven

Models:



CONTROL
PANEL



Standard Features:

- Dome-shaped reflector bounces heat in a focused manner, and watt distribution along the heater's length allows concentration of heat where it is most needed.
- Energy-saving "Sleep" mode.
- Innovative air curtain prevents heat loss.
- Cool-Skin exterior stays cool to the touch during operation.
- Faster toasted foods thanks to better convection and focused heat.
- Well suited to a variety of products - sandwiches, chicken nuggets, pizza, pretzels, tortillas and a variety of appetizers.
- No. 4 Stainless Steel Finish Standard.

Optional Colors:

- Black
- Navy Blue
- Red
- Hunter Green
- Gold

Specifications:



General: The Fusion™ infrared conveyor toaster is self-contained, conveyorized and stackable up to two high. It is designed for countertop use and must be used with the appropriate 4" legs for proper cooling. Intensity is adjustable from 0.0 to 10.0. Conveyor speed is adjustable from 15 seconds to 5.0 minutes cooking time. Removable crumb-trays for ease of cleaning.

Controls: The controls are located on the front of the unit. It includes a power on-off switch, intensity control, digital display, conveyor speed control, four programmable buttons/pre-sets with a "manual" cook setting mode, conveyor direction control, and sleep mode switch.

Construction: Exterior is fabricated from No. 4 finish stainless steel. The conveyor belt is a flexible stainless steel design with capacity for 8" (203.2mm) wide product and a travel distance of 40.25" (1022mm), of which 21" (533mm) is in the baking chamber. A DC, brushless motor powers the chain drive conveyor.



Restaurant Equipment Worldwide
Toll Free: 877.FOR.OVEN
International: +1 859.885.1988

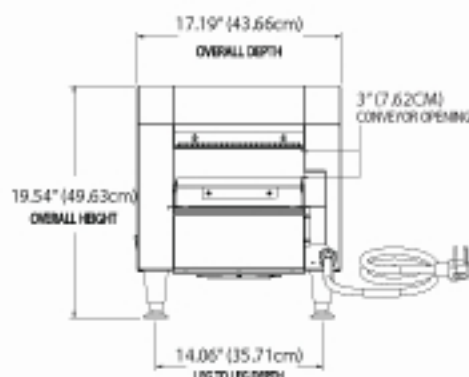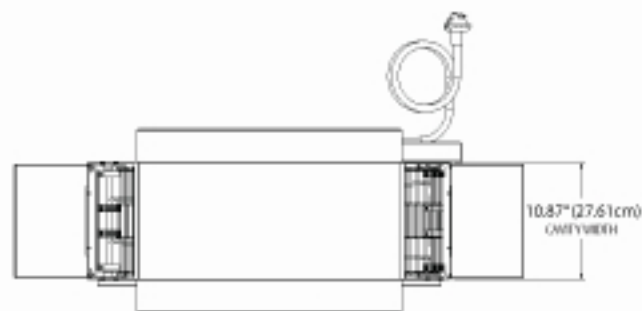

Electrical Service: Heat is supplied by nine (9) infrared heating elements on top and nine (9) infrared heating elements on the bottom of the unit. Each toaster is rated at 4.7kW. A separate circuit breaker is required for each toaster with the proper voltage, amperage, phase and hertz as indicated by model number. UNIT REQUIRES 30 AMP SERVICE. Plug type NEMA-30P.

Ventilation: Ventilation is not required but local codes prevail. These are the "authority having jurisdiction" as stated by the National Fire Protection Association, Inc. in NFPA 96-1994.

Spacing: The toaster must have 6" (152mm) of clearance from combustible surfaces and 24" (610mm) clearance on both sides from other cooking equipment.

Warranty: All new Infrared Conveyor Toasters come with a one year parts/labor warranty. Defective parts of the original equipment on all installed toasters are warranted for one year from the date of purchase.

Model No.	Height Single Stack	Height Double Stack	Belt Width	Input Rate	Volts	Amps	Phase	Hz
DOMESTIC MODEL								
2030	19.5" (50cm)	39" (99cm)	8" (20cm)	4.7kW	208/240	24	1	50/60
INTERNATIONAL MODEL								
2032	19.5" (50cm)	39" (99cm)	8" (20cm)	4.7kW	220/380 230/400 240/415	11.5	3	50/60

NOTE: Specifications subject to change without notice.



Restaurant Equipment Worldwide
Toll Free: 877.FOR.OVEN
International: +1 859.885.1988

Enodis