



XO-1 Tabletop Oven STANDARD FEATURES:

- Stainless steel construction
- Stainless steel legs (4")
- Tempered glass door
- Silicone rubber gasket on door
- Solid state controls

OPTIONS:

- Solid Door
- Catering Conversion
- Internal Steam
- Condensing Reservoir
- Stacking Kit
- Wire Racks
- Cart with Panslides
- Cart with Panslides (catering conversion)

CONSTRUCTION:

- Welded stainless steel utilizing 16 gauge
- Minimum of 2" insulation
- Control panel accessible through front of unit
- Heating elements accessible inside of cabinet and through side

CONTROLS:

- Solid state controls
- Indicator light for thermostat
- Two speed fan switch

DOOR SWING: • Oven: 17"

CLEARANCE:

- Allow four inches on each side and back of unit.

SERVICE CONNECTIONS:

- Unit is shipped from factory with a cord and plug.
- 120 Volt single phase is standard.
- One 1,700 Watt heating element is mounted in the sidewall.
- A 1/4" waterline is required if the internal steam option is selected. A water softening system should be used to minimize mineral build-up.

SHIPPING WEIGHT:

- 125 Pounds, FOB Menominee, MI 49858

DIMENSIONS:


	Height	Width	Depth
Exterior	20"	27-1/8"	28-1/8"
Interior	11-3/4"	15-3/4"	21-1/2"

CAPACITY:


	13"x18" Half Size Sheet Pans	Spacing
Oven	3	3-3/4"
	4	2"

ELECTRICAL:


Amp Draw	120/1	120/208/3	120/240/1	120/240/3
L1	16	n/a	n/a	n/a




120 Volt, 20 Amp
(NEMA 5-20 P)




TOP

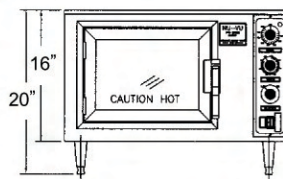

FRONT

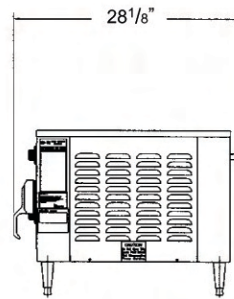

SIDE

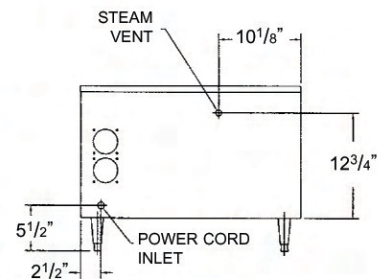

BACK