VULCAN

MODEL SG4C

C.S.I. Section 11420

SINGLE DECK GAS CONVECTION OVEN









SPECIFICATIONS:

Single section gas convection oven, Vulcan-Hart Model No. SG4C. Stainless steel front, sides, top, rear enclosure panel and legs. Independently operated stainless steel doors with windows open a full 180°. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interior measures 29"w x 221/8"d x 20"h. Two interior oven lights. Five nickel plated oven racks measure 281/4" x 211/4". Eleven position nickel plated rack guides with positive rack stops. Two 30,000 BTU/hr. burners, 60,000 BTU/hr. total input. Electronic spark igniters. Furnished with a two speed ½ H.P. oven blower-motor. Side mounted computer controls with digital time and temperature read-out. 'Roast and Hold' cycle. Six preset menu buttons and Shelf I.D. Power Level control allows the operator to adjust the heat input from 15,000 BTU/hr. to a maximum input of 60,000 BTU/hr. Oven cool switch for rapid cool down. 115 volt, 60 Hz, 1 ph power supply required. 6' cord and plug. 9 amps total draw.

Exterior dimensions: 40"w x $41\frac{1}{2}$ "d x $58\frac{3}{4}$ "h on $25\frac{3}{4}$ " legs. Depth measurement includes door handles.

CSA design certified. NSF listed.

SPECIFY TYPE OF GAS AND FINISH WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

STANDARD FEATURES

- Stainless steel front, sides, top, rear enclosure panel and legs.
- Stainless steel doors with windows.
- Two 30,000 BTU/hr. burners, 60,000 BTU/hr. total input.

Item #

- Electronic spark igniters.
- ½ H.P. two speed oven blower-motor. 115/60/1 with 6' cord and plug. 9 amps.
- Computer controls with digital time and temperature read-outs.
- 'Roast and Hold' cycle.
- Six preset menu buttons.
- Shelf I.D.
- Energy saving "Power Level" control allows the operator to adjust the heat input to the size of the load.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interior.
- Five nickel plated oven racks with eleven rack positions.
- ¾" rear gas connection with combination gas pressure regulator and safety solenoid system.

□ 208V or 240V, 60 Hz, 1 phase two speed blower motor, ½ H.P.

One year limited parts and labor warranty.

OPTIONS

	Stainless steel open stand with storage rack.						
	Casters.						
	Simultaneous doors.						
	Second year extended limited parts and labor warranty contract.						
Α	CCESSORIES						
	Extra oven rack(s).						
	Stainless steel drip pan.						
	Flexible gas hose with quick disconnect and restraining						
	device. Consult price book for available sizes.						




3 5/8 [92]

MODEL SG4C

SINGLE DECK GAS CONVECTION OVEN

IMPORTANT

- 1. A combination gas pressure regulator and safety solenoid system is included in this unit. Natural gas is 3.5" W.C., Propane gas is 10.0" W.C.
- 2. These units are manufactured for installation in accordance with ANSZ223.1 (latest edition), National Fuel Gas Code. Copies may be obtained from American Gas Association,
- 3. This appliance must be installed with a 6" clearance at both
- 4. This appliance is manufactured for commercial installation

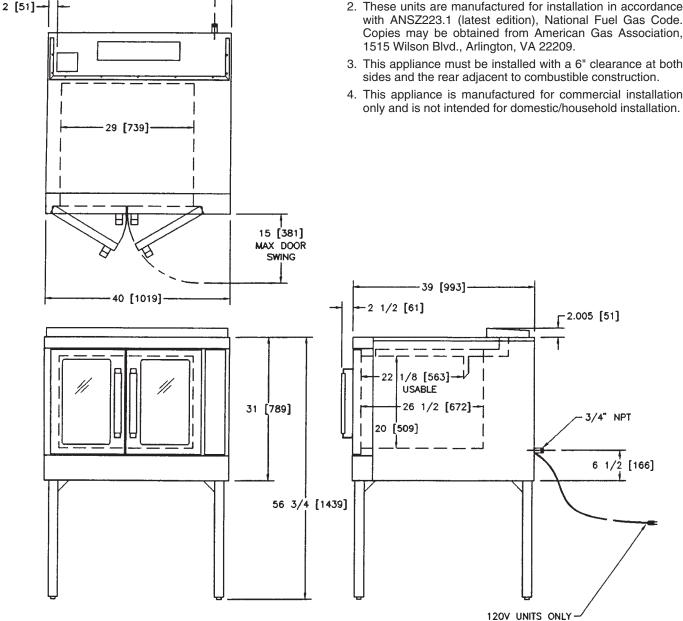

SINGLE OVEN	Width	Depth (Includes handles)	Height	BTU/hr. Per Oven	Total BTU/hr.	Electrical	Approx. Shp. Wt. (lbs./kg)
SG4C	40"	41½"	58¾"	60,000	60,000	115/60/1	590/266

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.

